


MTS T3M-V2

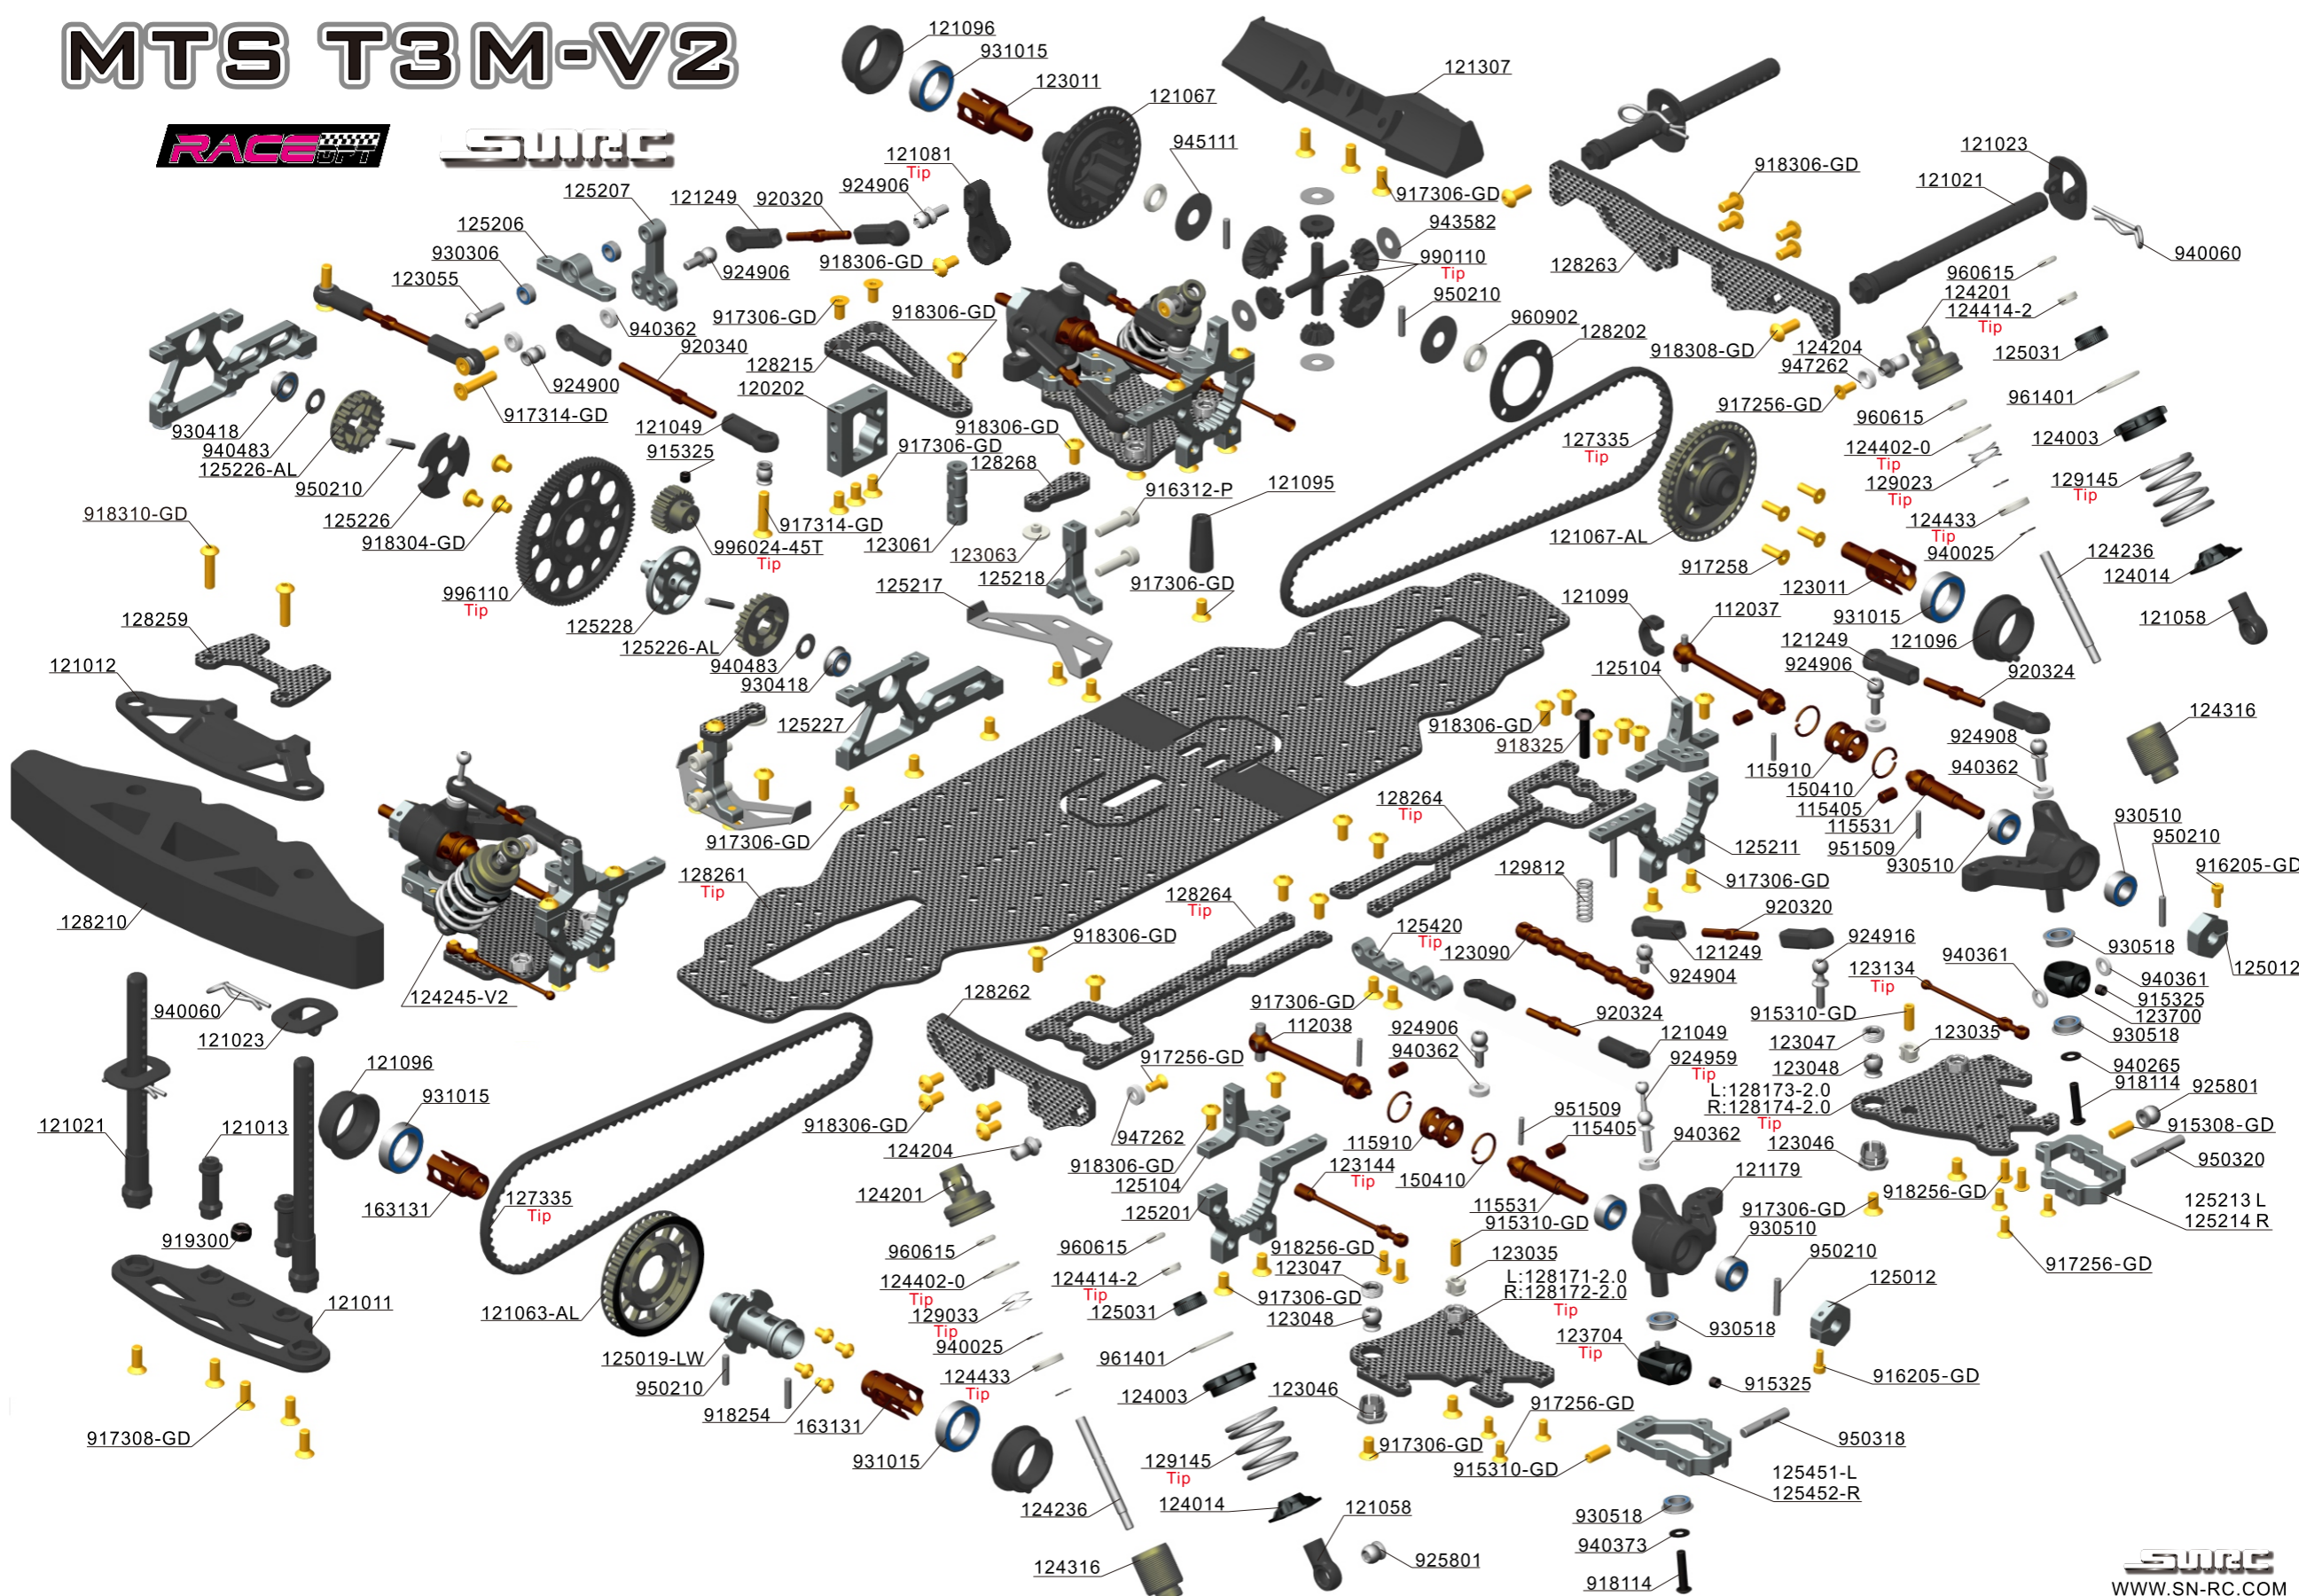

129023 129023 0.3x5x4x9.5 	
129012 0.2x4x3x9.5 129013 0.3x4x3x9.5 129022 0.2x5x4x9.5 129023 0.3x5x4x9.5 129032 0.2x6.5x5x9.5 129033 0.3x6.5x5x9.5	
124433 3 HOLE 	
124430 (0 HOLE) 124433 (3 HOLE) 124431 (1 HOLE) 124435 (5 HOLE) 124432 (2 HOLE) 124437 (7 HOLE)	
129145 1.4x17x4.5 SR 3.5kg 	
129140 1.4x17x4.0 RD 4.0kg 129145 1.4x17x4.5 SR 3.5kg 129150 1.4x17x5.0 YE 3.0kg 129155 1.4x17x5.5 BL 2.5kg	
120063 STANDARD-WH 	
120061 HIGH SMOOTH-BL 120062 SMOOTH-YE 120063 STANDARD-WH	
123134 1.4mm	123144 1.4mm
123132 1.2mm 123133 1.3mm 123134 1.4mm 123136 1.6mm	123142 1.2mm 123143 1.3mm 123144 1.4mm 123146 1.6mm
123224 ASSEMBLY 	
123224 1.2/1.3/1.4/1.6 mm	
990110 PA 	
990110-AL ALU	990110-F STEEL

SUNRC
WWW.SN-RC.COM

STANDARD	123704 H10 4°	121081 25T PA	125420 30-40mm	924959 4.9xM3x8 16	127335 117T	128261 CARBON FIBRE	128264 STANDARD	128171-2.0 FL 2.0mm	128172-2.0 FR 2.0mm	128173-2.0 RL 2.0mm	128174-2.0 RR 2.0mm	996110 110T/64P	996024 24-45T 64P
OPTION PART	 123702 H10 2° 123706 H10 6°	 125215 25T ALU 125216 23T ALU	 125317-LW 30mm 125418-LW 40mm	 924957 REGULATE	 127135 FIBRE 127235 PU	 128249 ALU	 128265 STRENGTHEN	 128171-2.5 FL 2.5mm 128172-2.5 FR 2.5mm	 128173-2.5 RL 2.5mm 128174-2.5 RR 2.5mm		 996024 24-45T 64P 996010 23-34T/64P 996011 35-45T/64P		